


Shield

- **Mil-I-DTL-23053/5**
- **Flame Retardant**
- **Excellent High Frequency EMI Shielding**
- **RoHS**
- **Easily Installs Over Connectors & Splices**

2:1 Shield Heatshrink Tubing

2:1 Shield heatshrink tubing is a unique combination of Polyolefin and conductive cloth, with a high frequency EMI shielding properties. This product, a flame retardant and fluid resistant tubing, is a perfect solution for protecting your wire & cable bundles.

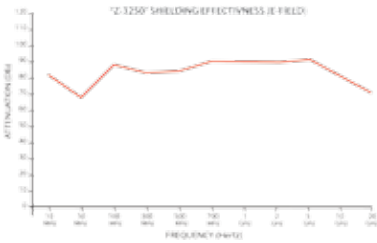

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/10Pcs.
3/16"	H2C0.19BK	4.8mm	2.4mm	12	2	Black (BK)	0.31
1/4"	H2C0.25BK	6.4mm	3.2mm	12	2	Black (BK)	0.50
3/8"	H2C0.38BK	9.5mm	4.8mm	12	2	Black (BK)	0.63
1/2"	H2C0.50BK	12.7mm	6.4mm	12	2	Black (BK)	0.75
3/4"	H2C0.75BK	19.1mm	9.5mm	12	2	Black (BK)	1.00
1"	H2C1.00BK	25.4mm	12.7mm	12	2	Black (BK)	1.50
1 1/2"	H2C1.50BK	38.1mm	19.1mm	12	2	Black (BK)	2.25

Glossy Polyolefin

- **Shrink Temp. 239°F**
- **Attractive Glossy Surface**
- **Excellent UV Resistance**
- **Good Electrical Properties & Chemical Resistance**

2:1 Glossy Polyolefin Heatshrink Tubing

2:1 Glossy Polyolefin heatshrink tubing is the ideal way to create a tight, professional finish on any wire, hose or cable management project. Once shrunk, the tubing will hold its reduced state even in elevated temperatures. The wide range of diameters and the attractive glossy finish makes this heatshrink a perfect solution for any termination application.



Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/8"	H2G0.13	3.2mm	1.6mm	500'	25'	RD,WH,BK,CL	0.43
3/16"	H2G0.19	4.8mm	2.4mm	200'	25'	RD,WH,BK,CL	0.60
1/4"	H2G0.25	6.4mm	3.2mm	200'	25'	RD,WH,BK,CL	1.04
3/8"	H2G0.38	9.5mm	4.7mm	200'	25'	RD,WH,BK,CL	1.31
1/2"	H2G0.50	12.7mm	6.4mm	200'	25'	RD,WH,BK,CL	1.52
3/4"	H2G0.75	19.1mm	9.5mm	100'	25'	RD,WH,BK,CL	2.58
1"	H2G1.00	25.4mm	12.7mm	100'	25'	RD,WH,BK,CL	3.74
1 1/2"	H2G1.50	38.1mm	19.1mm	100'	25'	RD,WH,BK,CL	5.53
2"	H2G2.00	50.8mm	25.4mm	100'	25'	RD,WH,BK,CL	8.25

800 323-5140
www.techflex.com

*Contact your Account Representative for heatshrink cutting & printing services.